

Remove concrete for driveway construction where required. Saw cut to full depth prior to removal.

Remove Curb and Gutter. Entire curb and gutter section shall be removed prior to driveway construction.

2' Min.

If curb cannot be removed clean, sawcut pavement and patch per section 3010

**REMOVALS**

Install expansion joint w/ 1/2" x 18" smooth dowels @ 24" O.C.

Sidewalk/path

Install expansion joint

Variable 10' min.

4"  
8.3% max.

2 - 4% Blvd. slope

6"  
2% max.

4"  
8.3% max.

Min. 53°


Knock Down - curb and gutter. (see detail)

3' Flare typ.

**ISOMETRIC**

**Notes:**

1. Where connecting to existing concrete, install expansion joint w/ min. two 1/2" x 18" smooth dowels @ 24" O.C
2. Driveways greater than 10' wide shall have contraction joints perpendicular to curb with minimum 10' spacing. Match curb joints.
3. Forms are required on all edges.
4. All HMA patches shall be NDDOT FAA 43 HMA pavement, PG 58S-28.

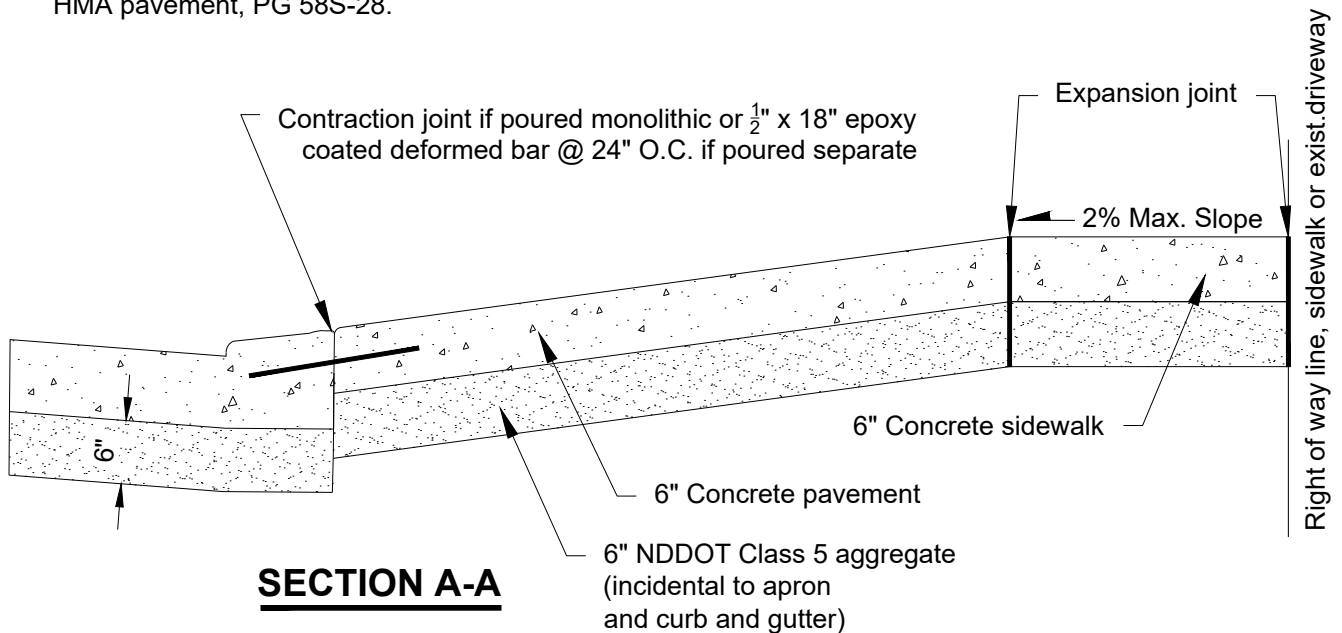

**SECTION A-A**

City Plate No.: STR-11B  
Last Revision: 12/18/2020  
Section: 3300

**STANDARD DETAILS  
CONCRETE DRIVEWAY APRON  
BOULEVARD 1.5 FT TO 4 FT**

