

Remove concrete for driveway construction where required. Saw cut to full depth prior to removal.

Remove Curb and Gutter. Entire curb and gutter section shall be removed prior to driveway construction.


2' Min.

If curb cannot be removed clean, sawcut pavement and patch per section 3010

**REMOVALS**

Install expansion joint w/ 1/2" x 18" smooth dowels @ 24" O.C.


Property line

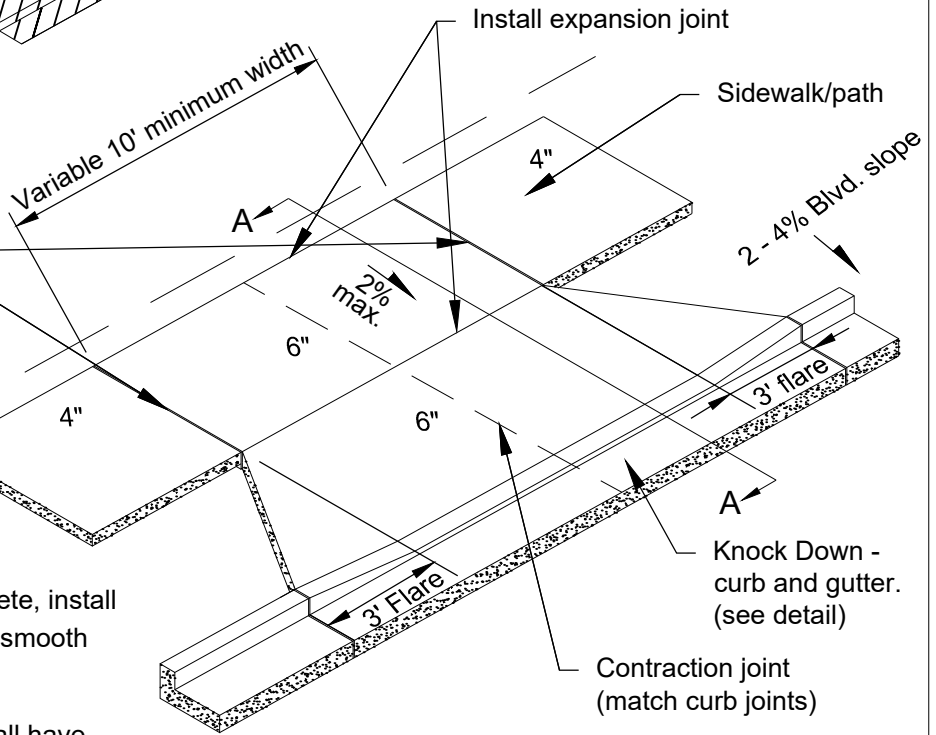

**ISOMETRIC**

Notes:

1. Where connecting to existing concrete, install expansion joint w/ min. two 1/2" x 18" smooth dowels @ 24" O.C
2. Driveways greater than 10' wide shall have contraction joints perpendicular to curb with minimum 10' spacing. Match curb joints.
3. Forms are required on all edges.
4. All HMA patches shall be NDDOT FAA 43 HMA pavement, PG 58S-28.

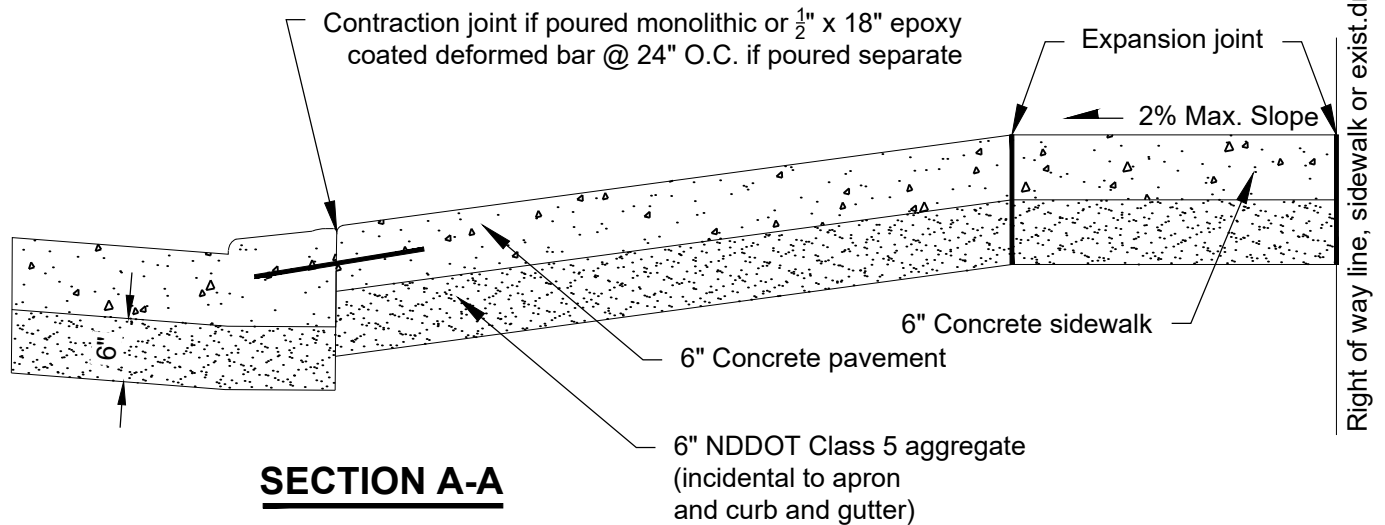

**SECTION A-A**

M:\STANDARD SPECS & DETAILS\2022\Details\STR-11C CONCRETE DRIVEWAY APRON BOULEVARD GREATER THAN 4 FT.dwg

City Plate No.:  
STR-11C

Last Revision:  
12/18/2020

Section:  
3300

**STANDARD DETAILS  
CONCRETE DRIVEWAY APRON  
BOULEVARD GREATER THAN 4 FT**

