
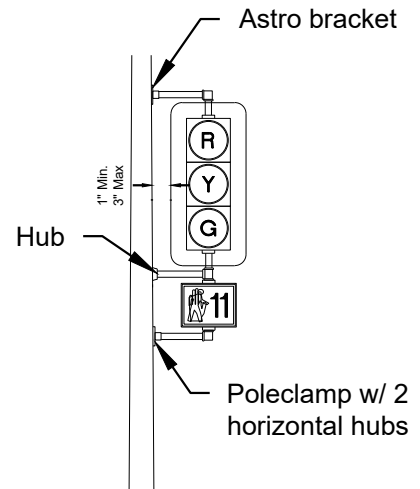


TYPE II-10' HEIGHT
PEDESTAL MOUNTED-PEDESTRIAN

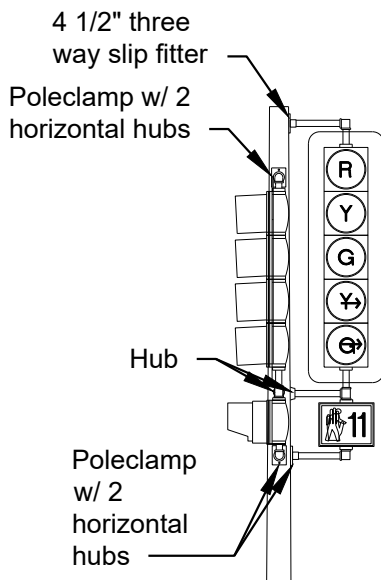

TYPE V-15' HEIGHT
POST MOUNTED-PEDESTRIAN
POST MOUNTED-VEHICULAR

TYPE VI-17.5' HEIGHT
POST MOUNTED-PEDESTRIAN
POST MOUNTED-VEHICULAR

Notes:

Clearance

Clearance from ground line or sidewalk to the bottom of post or pedestal mounted vehicular signal heads shall be 10'. Minimum from pedestrian signal shall be 8'.

Signal Heads

See plans for correct mounting position, numbers, size, and arrangement of lenses.

Pole clamps

A pole plate with suitable banding material as approved by the Engineer shall be used.

Color

Signal housing shall be black, see plans. Back plate shall be dull black. Pole clamps and signal head mounting hardware shall be black.

M:STANDARD_SPECS & DETAILS\2021\Details\TRA-4D_SIGNAL_POLE_HEAD_MOUNTING.dwg

City Plate No.: TRA-4D
Last Revision: 12/18/2020
Section: 3800

STANDARD DETAILS
SIGNAL POLE HEAD MOUNTING

