



PLAN

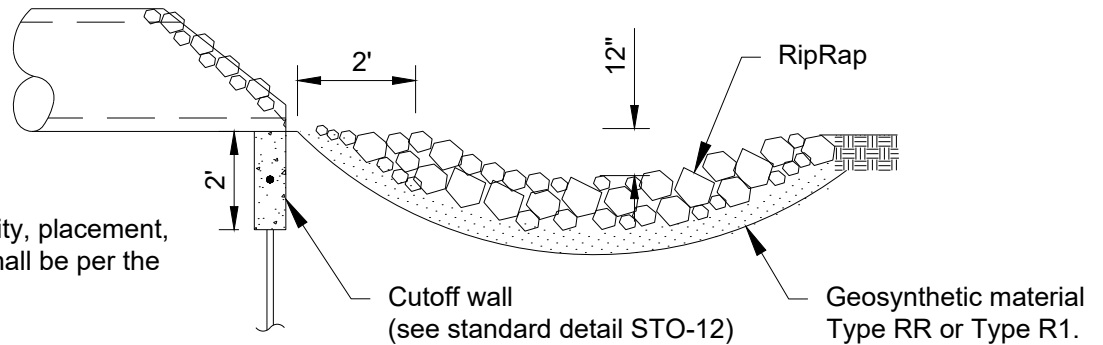

SECTION A-A

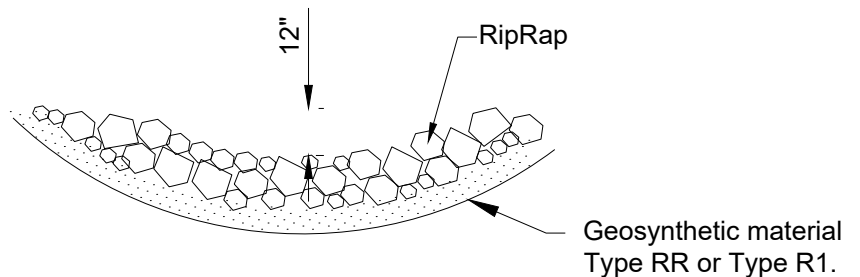

SECTION B-B

Notes:

1. Riprap size, quantity, placement, and dimensions shall be per the Plans.
2. Construct cutoff wall 4' wider than end section.
3. Rebar centered within the cutoff wall shall be #4 @ 12" O.C. both horizontal and vertical.
4. A 1/4" min. steel plate may be bolted to the face of the bottom of the end section with stainless steel anchor bolts as a substitute for the concrete cutoff wall. The plate shall be 4' deep and 4' wider than the end section.

M:\STANDARD_SPECS & DETAILS\2021\Details\STO-11_STABILIZED OUTFALL.dwg

City Plate No.:
STO-11
Last Revision:
12/18/2020
Section:
2700

**STANDARD DETAILS
STABILIZED OUTFALL**

